



ABM LINE 2 Floor Tile Collections

AM
BAB
DYL
GRAF
PORT
RAC
BIANCO
RENE
RE
TABA



Marble Collection





ABM RAC BLANCO GLOSSY 60,8X60,8



ABM BAB GRIS GLOSSY 60,8X60,8 / plain grey



ABM GRAF PERLA 60,8X60,8 GLOSSY



ABM GRAF CREMA GLOSSY 60,8X60,8



ABM TABA MARFIL GLOSSY 60,8X60,8 / crema marfil

MARBLE + GLOSSY

SLIM PORCELAIN TILES



ABM BAB GRIS (plain grey)



ABM BAB MARFIL (plain beige)



60,8X60,8
GLOSSY



ABM BAB (plain grey light)




ABM BAB TAUPE (plain taupe)

THICKNESS	
8,5mm	
MQ/BOX	PZ/BOX
1,85	5
KG/BOX	KG/PLT
33,5	1025
BOX/PLT	M2/PLT
30	55,5



ABM RAC BLANCO
(carrara)

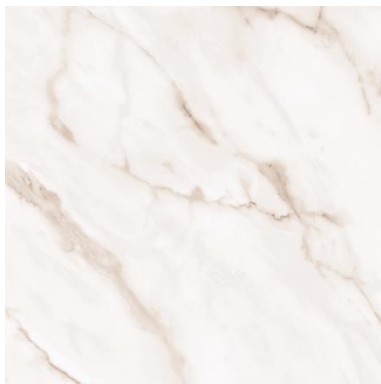

ABM RAC CREMA
(calacata brown)




ABM TABA MARFIL

MARBLE + GLOSSY

PORCELAIN TILES



ABM GRA CREMA

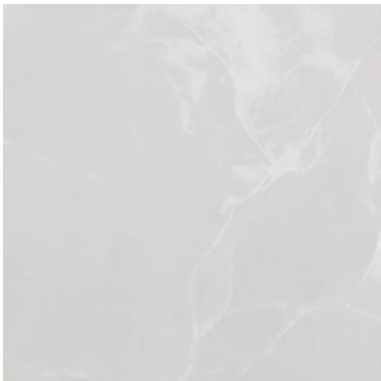

ABM GRA PERLA



ABM RENE CREMA



ABM RENE GOLD



ABM RENE GRIS



ABM RENE PERLA



60,8X60,8
GLOSSY


THICKNESS	
9,5mm	
MQ/BOX	PZ/BOX
1,48	4
KG/BOX	KG/PLT
31	950
BOX/PLT	M2/PLT
30	44,4

MARBLE + GLOSSY

PORCELAIN TILES



ABM RAC BLANCO
60X120 **GLOSSY**



60X60 **GLOSSY**




60X120 **GLOSSY**

PACKAGING / WEIGHTS


Dimension	Thickness	Surface	Pcs/Box	M ² /Box	KG/Box	Box/Pallet	M ² /Pallet
60,8X60,8	8,5mm	Matt	5	1,85	33,5	30	55,5
60X120	9mm	Matt	2	1,44	27,7	36	51,84

MARBLE + GLOSSY

PORCELAIN TILES

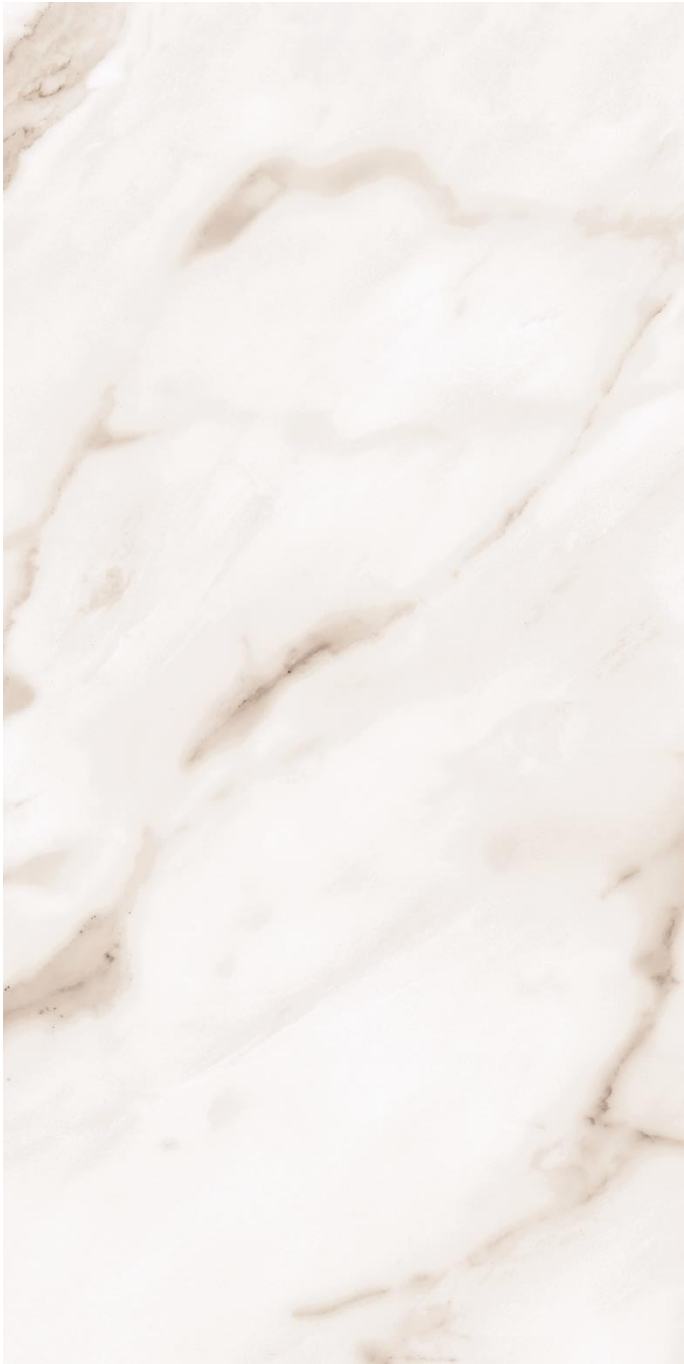

ABM RAC CREMA
60X120 **GLOSSY**



60X60 **GLOSSY**



60X120 **GLOSSY**

PACKAGING / WEIGHTS

Dimension	Thickness	Surface	Pcs/Box	M ² /Box	KG/Box	Box/Pallet	M ² /Pallet
60,8X60,8	8,5mm	Matt	5	1,85	33,5	30	55,5
60X120	9mmm	Matt	2	1,44	27,7	36	51,84

MARBLE + MATT



ABM RE BLANCO 60,8X60,8 MAT / carrara mat

MARBLE + MATT

PORCELAIN TILES



ABM RE BLANCO
60X120 **MATT** /
carrara mat



60X60 **MATT**



60X120 **MATT**

PACKAGING / WEIGHTS


Dimension	Thickness	Surface	Pcs/Box	M ² /Box	KG/Box	Box/Pallet	M ² /Pallet
60,8X60,8	8,5mm	Matt	5	1,85	33,5	30	55,5
60X120	9mm	Matt	2	1,44	27,7	36	51,84

Outdoor Collection






ABM AM IVORY 60,8X60,8

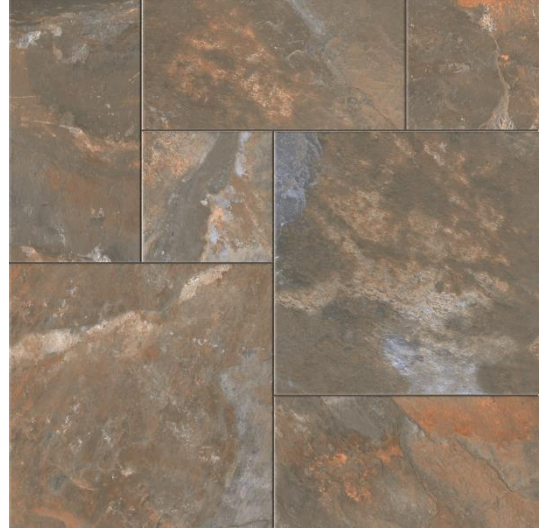

ABM AM MUSGO 60,8X60,8

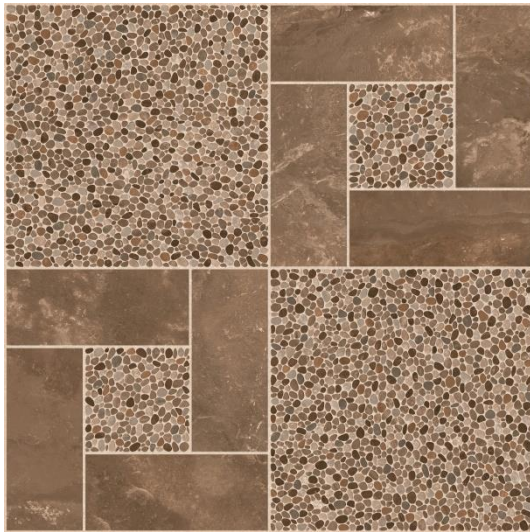

ABM PORT TIERRA 60,8X60,8




ABM PORT MAGMA 60,8X60,8



ABM PORT TIERRA 60,8X60,8

Outdoor Collection

DESCRIPTION	GLAZED PORCELAIN R11
THICKNESS	9,5



60,8x60,8

PACKAGING / WEIGHTS

Dimension	Thickness	Surface	Pcs/Box	M ² /Box	KG/Box	Box/Pallet	M ² /Pallet
60,8X60,8	9,5mm	Matt	5	1,85	33,5	30	55,5

ABM Dyl



grey



perla



taupe




marfil




ABM Dyl

DESCRIPTION	SLIM PORCELAIN
THICKNESS	8,5 & 9 mm



60x120



60,8x60,8

PACKAGING / WEIGHTS

Dimension	Thickness	Surface	Pcs/Box	M ² /Box	KG/Box	Box/Pallet	M ² /Pallet
60,8X60,8	8,5mm	Matt	5	1,85	33,5	30	55,5
60X120	9mmm	Matt	2	1,44	27,7	36	51,84

Marfil



Taupe



Perla



Grey



TECHNICAL FEATURES

GROUP BIa (GL) Water absorption < 0,5%0		STANDARD	VALUE REQUIRED BY EN 14411 STANDARD	AVERAGE VALUE
Dimensional features		ISO 10545-2		Conforms to standard
Water absorption		ISO 10545-3	< 0,5%	0,10%
Modulus of rupture	Modulus of rupture	ISO 10545-4	> 35 N / mm2	35 - 45 N/ mm2
	Breaking strength		> 1300 N	1800 - 2500 N
Resistance to surface abrasion		ISO 10545-7	Abrasion class indicated by the manufacturer	According to models
Linear thermal		ISO 10545-8	Test method available	<7,0 x 10-6 °C-1
Thermal shock resistance		ISO 10545-9	Test method available	Resists
Crazing resistance		ISO 10545-11	Required	Resists
Frost resistance		ISO 10545-12	Test method available	Resists
Chemical resistance	Cleaning products and pool reactive agents	ISO 10545-13	Test method available	Conforms to standard
			Minimum GB	Class GA
Resistance to stains		ISO 10545-14	Minimum class 3	Conforms to standard
GROUPE BIb (GL) Water absorption 0,5% < E< 3%		STANDARD	VALUE REQUIRED BY EN 14411 STANDARD	AVERAGE VALUE
Dimensional features		ISO 10545-2		Conforms to standard
Water absorption		ISO 10545-3	0,5% < E< 3%	2%
Modulus of rupture	Modulus of rupture	ISO 10545-4	> 30 N / mm2	35 - 45 N/ mm2
	Breaking strength		> 1100 N	1800 - 2500 N
Resistance to surface abrasion		ISO 10545-7	Abrasion class indicated by the manufacturer	According to models
Linear thermal		ISO 10545-8	Test method available	<7,0 x 10-6 °C-1
Thermal shock resistance		ISO 10545-9	Test method available	Resists
Crazing resistance		ISO 10545-11	Required	Resists
Frost resistance		ISO 10545-12	Test method available	Resists
Chemical resistance	Cleaning products and pool reactive agents	ISO 10545-13	Test method available	Conforms to standard
			Minimum GB	Class GA
Resistance to stains		ISO 10545-14	Minimum class 3	Conforms to standard

TECHNICAL FEATURES GLAZED/ POLISHED/ WOOD PORCELAIN TILES

GROUP BIa (GL) Water absorption < 0,5%		STANDARD	VALUE REQUIRED BY EN 14411 STANDARD	AVERAGE VALUE
Dimensional features		ISO 10545-2		Conforms to standard
Water absorption		ISO 10545-3	< 0,5%	0,10%
Modulus of rupture	Modulus of rupture	ISO 10545-4	> 35 N / mm ²	35 - 45 N/ mm ²
	Breaking strength		> 1300 N	1800 - 2500 N
Resistance to deep abrasion mm ³		ISO 10545-6	Maximum 175 mm ³	110-130 mm ³
Linear thermal		ISO 10545-8	Test method available	<7,0 x 10 ⁻⁶ 9C ⁻¹
Thermal shock resistance		ISO 10545-9	Test method available	Resists
Crazing resistance		ISO 10545-11	Required	Resists
Frost resistance		ISO 10545-12	Test method available	Resists
Chemical resistance	Acids and bases	ISO 10545-13	Test method available	Conforms to standard
	Cleaning products and pool reactive agents		Minimum UB	Class UA
Resistance to stains		ISO 10545-14	Minimum class 3	Conforms to standard
Resistance to stains		DIN 51130 DIN 51097 UNE-ENV 12633 ASTM C 1028		Conforms to models

ABM HELLAS SA
Thesi Laka Kirilou, 19300
Aspropyrgos, Greece
T +30 210 5596903
F +30 210 5596298
hellas@abmcosmos.com